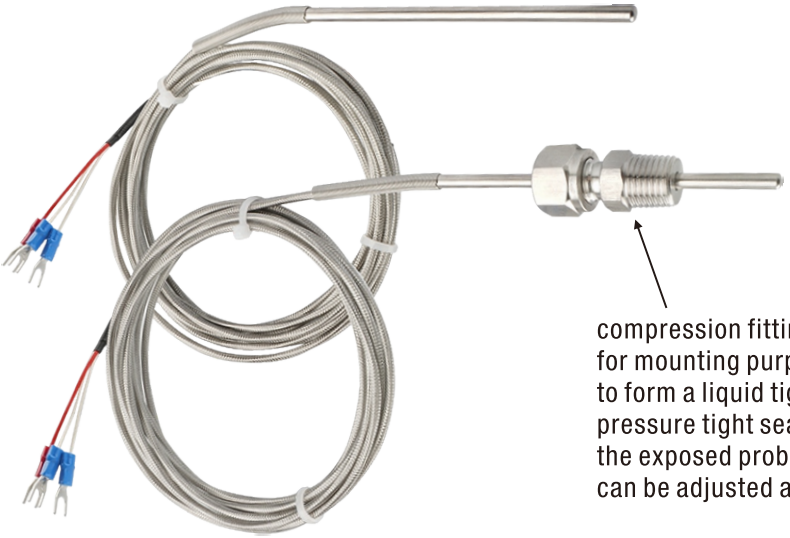

1/8NPT | 1/4NPT | 1/4BSP | 1/2NPT | M8*1mm | M10*1mm | Weld-in SS

Probe length
- 30: 30mm
- 40: 40mm
- 50: 50mm

Lead wire length
- 2000: 2 meters
- 3000: 3 meters
- 5000: 5 meters

Temperature range
- 100: 100°C
- 200: 200°C
- 300: 300°C

PT100-8----4----50----1/2NPT----2000----SS-AD--200

Probe Diameter
- 4:4mm
- 5:5mm
- 6:6mm

Process fittings
- N: NO process fittings
- 1/2NPT:1/2NPT fittings

Lead wire material
- SS: Stainless steel wire
- SILI:Silicon wire
- FBGL:Fiber glass wire
- FEFL:Teflon wire

This RTD probe can be used for measuring the temperature of air or liquid. The probe is protected with 304 stainless steel. It is 3/16" (or 4.8 mm) in diameter. The cable is shielded with metal braid and covered with PTFE insulation. It is one of the best cable available for the RTD probe.... low noise, high strength and high temperature resistant.