
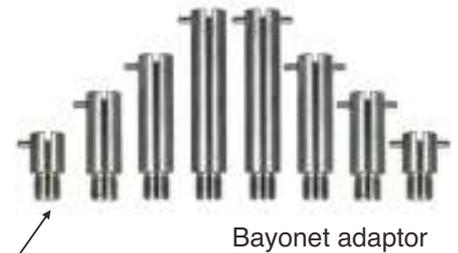


This is a non-adjustable bayonet sensor with spring reinforcement, This item is similar to TC-K6, TC-J6, the difference is that you can not adjust the bayonet cap up or down along the spring for TC-K7 and TC-J7

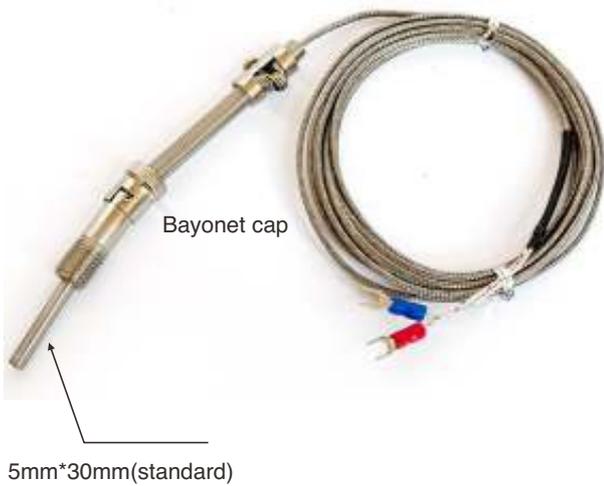

Example: TC-J7-5-30-M12-3000-SS-GD
 Thermocouple type J M12 Bayonet adaptor
 Code: J7 3 meters lead wire
 Probe diameter: 5mm Stainless steel lead wire
 Probe length: 30mm Grounded type

Ordering Information(quick ordering code TC-K7 or TC-J7)

TC-K7, Thermocouple type K, code K7
 TC-J7, Thermocouple type J, code J7



1:Probe diameter(mm),customizable,other size not listed below but also available

4	Probe diameter 4mm
5	Probe diameter 5mm
8	Probe diameter 8mm

2:Probe length(mm),customizable,other size not listed below but also available

30	Probe length 30mm(popular size)
50	Probe length 50mm

3:Screw specs of the bayonet adaptors

M12	M12 thread on the bayonet adaptors(popular one)
1/8 NPT	1/8 NPT thread on the bayonet adaptors

4:Lead wire length(unit:mm),lead wire length is customized, can be any length you want

2000	2000mm lead wire
3000	3000mm lead wire
5000	5000mm lead wire

5:Lead wire material

SS	Stainless steel wire
SILI	Silicon wire
FG	Fiber glass insulation wire
TF	Teflon wire

6:Grounded or ungrounded type

GD	Grounded type(standard one, also known as non-isolation type)
UG	Ungrounded type(also known as isolation type)